

Securing technology for you











Table of Contents





03.1 **GU-SECURY SH2** Door Lock & Lever Handle **GU-SECURY SH2** SH2 Extension.......03.1.6 **HANDLES 30mm Plate Series 45mm Plate Series** VENICE Trim Kits.......03.1.**15** 55mm Plate Series Antique Handle & 40mm Plate Series ROMANCE Trim Kits......03.1.17

 Strike Plates
 03.1.18

 Accessories
 03.1.21

ACCESSORIES





GU-SECURY SH2 Door Lock

with Latch, Deadbolt and 2 Hook Bolts









| GU-SECURY SH2 Door Lock for Lever Handle | | | | |
|--|-----------------|----|-----------------|--|
| Description | Color | PU | Part Number | |
| Door lock for 6' 8" doors with 45mm backset | Stainless Steel | 5 | 6-33935-02-0-8B | |
| Door lock for 8' doors with 45mm backset | Stainless Steel | 5 | 6-33935-03-0-8B | |
| Door lock for 6' 8" doors with 50mm backset | Stainless Steel | 5 | 6-33935-04-0-8B | |
| Door lock for 8' doors with 50mm backset | Stainless Steel | 5 | 6-33935-05-0-8B | |
| Door lock for 6' 8" doors with 60mm backset | Stainless Steel | 5 | 6-33935-06-0-8B | |
| Door lock for 8' doors with 60mm backset | Stainless Steel | 5 | 6-33935-07-0-8B | |
| * = Color PU = Packaging Unit | | | | |

Get Hooked on Security!

GU-SECURY SH2 locking system activates by closing the door and lifting the handle upwards. This action will engage the hooks into the strike plates which enhances the weathersealing properties and provides maximum security. You then simply turn the key or the knob to allow the two hookbolts and deadbolt to extend into the strikeplates, securing the door in three positions


- 3-point, one piece locking system for 6'8" and 8' doors
- Heavy duty mortise construction with reinforced lever return spring system
- Locking by US-cylinder with 90° turn of key or thumb-turn
- Lever controlled engaging and releasing of deadbolt, and two hook bolts
- Two hookbolt 1" (25mm) lock in an upward direction providing an anti-lift device
- 1" (25mm) increased resistance against pullout throw on deadbolt
- Non handed, latch with build-in failsafe (anti-slam) easily reversible
- 8mm square spindle
- 92mm centres (spindle to cylinder)
- Handle height variable (36" recommended)
- 16mm stainless steel faceplate with radius ends for easy installation and cleaner look
- Same hardware groove detail throughout our entire door lock program (jig, router base and bits available)
- Extension with additional lock point is available for doors taller than 8' (6-36062-04-0-8B)
- To be used with lever handle set (US-cylinder above handle)


SH2 Extension

with Additional Hook Bolt





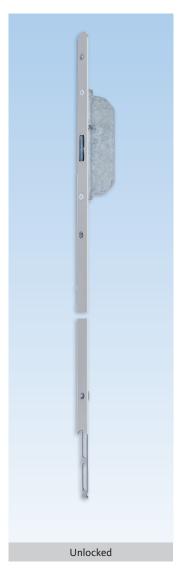

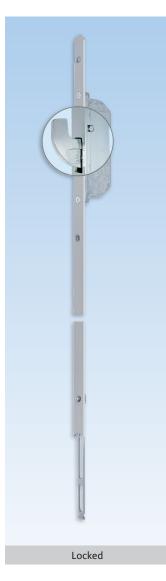

| Extension | | | |
|----------------------------------|-----------------|---------|-----------------|
| Description | Color | PU | Part Number |
| 525mm extension with rounded end | Stainless Steel | 5 | 6-36062-04-0-8B |
| | * = Color | PU = Pa | ckaging Unit |

- Steel horn with 1" (25mm) projection
- 16mm stainless steel faceplate with radius end for easy installation and cleaner look
- Additional locking point for doors taller than 8'
- To be used with GU-SECURY SH2 door Locks (6-33935-XX-0-8B)

Introduction





Ferco lever handle sets are uniquely designed to operate on multipoint door locks. Our handle sets withstand the rigourous everyday operational wear & tear of engaging or disengaging multiple lock points. **Our handle sets are designed for long term use!**


- **Patented handle snap-rings** allow for handles to be shipped non-handed. The manufacturer no longer has to worry about ordering left or right, and will save on inventory.
- Handle setscrews to fasten spindles combined with the snap-ring will ensure the handle will stay tight on the door for a long time.
- **Self centering 8mm split Spindle** to make sure it is always centered into the door.
- Longer Screw ports on escutcheons: Ferco has added an interior sleeve port that will guide the M5 mm screw straight to the opposing exterior screw port.
- Exterior O-ring on handle shaft to prevent water from entering around the exterior handle.
- Washers between handle and escutcheon making sure the handle operation is and remains smooth.
- Escutcheon Foam gasket to prevent air and cold.
- Rubber gasket (Order separately) to prevent air and water leakage around the exterior escutcheon.
- Schlage Cylinder with one tail for both 1 3/4" and 2 1/4" thick doors
- M5 handle set screws to fasten the escutcheons included in every handle set kit.
- Handle above cylinder or handle below cylinder option
- **FERCO handle sets available** in Solid Brass or economical zinc die-cast material with selections in many plate designs, lever styles and finishes.

Finishes For Handle Set Program

- US-Cylinder Above Handle



FERCO

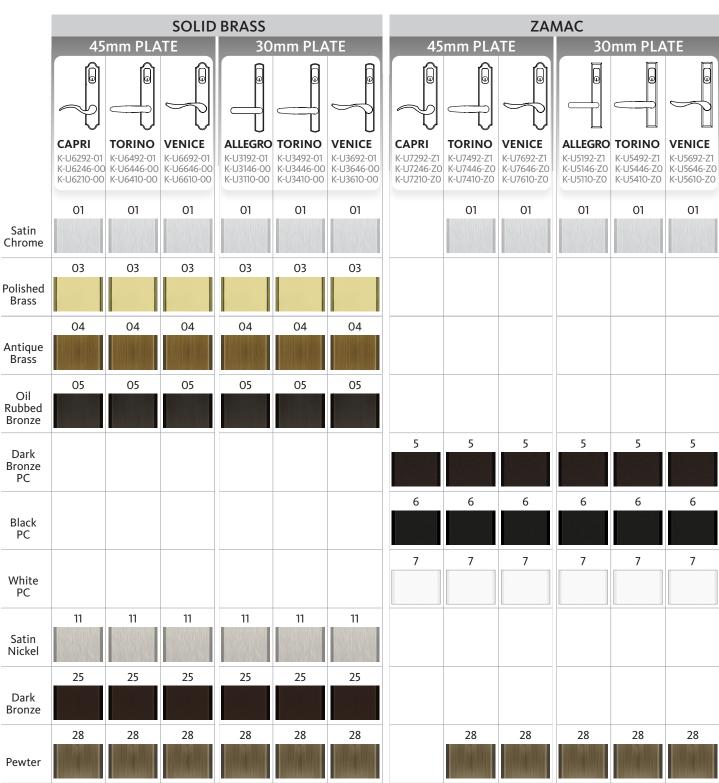

Colors on this document are graphic representation and may not be an exact match for the actual painted/plated hardware.


For color selection, material samples are available on request.

Finishes For Handle Set Program

- US-Cylinder Above Handle





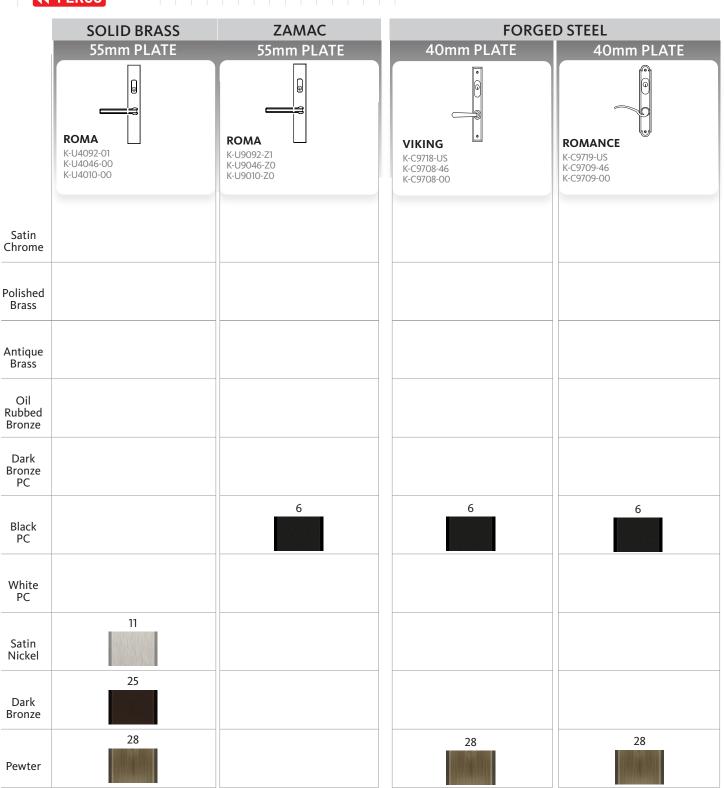

Colors on this document are graphic representation and may not be an exact match for the actual painted/plated hardware.

For color selection, material samples are available on request.

ALLEGRO Handles & 30mm Plates







Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle




Additional information

- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

ALLEGRO Solid brass Trim Kits Description PU Part Number Handle sets for active doors with US-cylinder 1 K-U3192-01-0-* Handle sets for semi-active doors 1 K-U3146-00-0-* Handle sets for fixed doors 1 K-U3110-00-0-* * = Color PU = Packaging Unit

01 = Satin Chrome, 03 = Polished Brass, 04 = Antique Brass, 05 = Oil Rubbed Bronze, 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter



- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

| ALLEGRO Zamac Trim Kits | | | |
|-------------------------------|----------------------------|---------|-----------------|
| Description | | PU | Part Number |
| Handle sets for active doc | ors with US-cylinder | 1 | K-U5192-Z1-0-* |
| Handle sets for semi-activ | ve doors | 1 | K-U5146-Z0-0-* |
| Handle sets for fixed door | rs | 1 | K-U5110-Z0-0-* |
| | * = Color | PU = Pa | ckaging Unit |
| 01 = Satin Chrome, 5 = Dark E | Bronze PC, 6 = Black PC, 7 | = White | PC, 28 = Pewter |
| 01 5 6 7 28 | | | |
| | | | |
| K-U5192-Z1-0-* | K-U5146-Z0-0-* | | K-U5110-Z0-0-* |

- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

TORINO Handles & 30mm Plates



FERCO



Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle



Additional information


- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

TORINO Solid brass Trim Kits

| Description | PU | Part Number |
|---|-------|----------------|
| Handle sets for active doors with US-cylinder | 1 | K-U3492-01-0-* |
| Handle sets for semi-active doors | 1 | K-U3446-00-0-* |
| Handle sets for fixed doors | 1 | K-U3410-00-0-* |
| * C.L. | DII D | 1 |

01 = Satin Chrome, 03 = Polished Brass, 04 = Antique Brass,

05 = Oil Rubbed Bronze, 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter

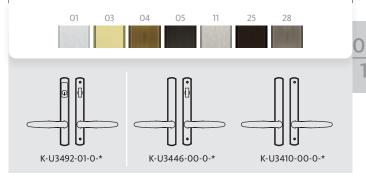


- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

TORINO Zamac Trim Kits

| Description | | Part Number |
|---|---------|----------------|
| Handle sets for active doors with US-cylinder | | K-U5492-Z1-0-* |
| Handle sets for semi-active doors | | K-U5446-Z0-0-* |
| Handle sets for fixed doors | | K-U5410-Z0-0-* |
| * = Color | PU = Pa | ckaging Unit |

01 = Satin Chrome, 5 = Dark Bronze PC, 6 = Black PC, 7 = White PC, 28 = Pewter



- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

VENICE Handle & 30mm Plate







Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle




Additional information

- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

VENICE Solid Brass Trim Kits Description PU Part Number Handle sets for active doors with US-cylinder 1 K-U3692-01-0-* Handle sets for semi-active doors 1 K-U3646-00-0-* Handle sets for fixed doors 1 K-U3610-00-0-* * = Color PU = Packaging Unit

01 = Satin Chrome, 03 = Polished Brass, 04 = Antique Brass, 05 = Oil Rubbed Bronze, 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter



- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

VENICE Zamac Trim Kits

| Description | | PU | Part Number |
|---|----------------------------|---------|-----------------|
| Handle sets for active doors with US-cylinder | | 1 | K-U5692-Z1-0-* |
| Handle sets for semi-acti | ve doors | 1 | K-U5646-Z0-0-* |
| Handle sets for fixed doo | rs | 1 | K-U5610-Z0-0-* |
| | * = Color | PU = Pa | ackaging Unit |
| 01 = Satin Chrome, 5 = Dark | Bronze PC, 6 = Black PC, 7 | = White | PC, 28 = Pewter |
| 01 | 5 6 7 | 28 | |
| K-U5692-Z1-O-* | K-U5646-ZO-0-* | 2 | K-U5610-Z0-0-* |

- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

CAPRI Handles & 45mm Plates







Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle




Additional information

- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

CAPRI Solid Brass Trim Kits

| Description | | Part Number |
|---|--|----------------|
| Handle sets for active doors with US-cylinder | | K-U6292-01-0-* |
| Handle sets for semi-active doors | | K-U6246-00-0-* |
| Handle sets for fixed doors | | K-U6210-00-0-* |
| * = Color | | ackaging Unit |

01 = Satin Chrome, 03 = Polished Brass, 04 = Antique Brass, 05 = Oil Rubbed Bronze, 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter

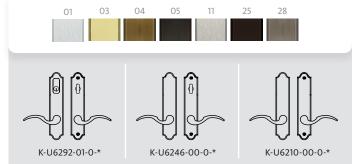


- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

CAPRI Zamac Trim Kits

| Description | | Part Number |
|---|--|----------------|
| Handle sets for active doors with US-cylinder | | K-U7292-Z1-0-* |
| Handle sets for semi-active doors | | K-U7246-Z0-0-* |
| Handle sets for fixed doors | | K-U7210-Z0-0-* |
| * = Color | | ckaging Unit |

5 = Dark Bronze PC, 6 = Black PC, 7 = White PC



- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

TORINO Handles & 45mm Plates







Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

| TORINO Solid Brass Trim Kits | | | | |
|--|------------------|---------|----------------|--|
| Description | | PU | Part Number | |
| Handle sets for active doors | with US-cylinder | 1 | K-U6492-01-0-* | |
| Handle sets for semi-active of | loors | 1 | K-U6446-00-0-* | |
| Handle sets for fixed doors | | 1 | K-U6410-00-0-* | |
| | * = Color | PU = Pa | ackaging Unit | |
| 01 = Satin Chrome, 03 = Polished Brass, 04 = Antique E 05 = Oil Rubbed Bronze, 11 = Satin Nickel, 25 = Dark B | | | = Pewter | |
| | | | | |
| | | o | | |
| K-U6492-01-0-* | K-U6446-00-0-* | o — | K-U6410-00-0-* | |

- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle



- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

| TORINO Zamac Trim Kits | | | |
|---|---------|----------------|--|
| Description | PU | Part Number | |
| Handle sets for active doors with US-cylinder | 1 | K-U7492-Z1-0-* | |
| Handle sets for semi-active doors | 1 | K-U7446-Z0-0-* | |
| Handle sets for fixed doors | 1 | K-U7410-Z0-0-* | |
| * = Color | PU = Pa | ckaging Unit | |
| 01 = Satin Chrome, 5 = Dark Bronze, 6 = Black, 7 = White, 28 = Pewter | | | |
| 01 5 6 7 | 28 | | |
| K-U7492-Z1-O-* K-U7446-ZO-O-* | | K-U7410-Z0-0-* | |

- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

VENICE Handle & 45mm Plate



FERCO



Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle




Additional information

- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle



| Description | | Part Number |
|---|--|----------------|
| Handle sets for active doors with US-cylinder | | K-U6692-01-0-* |
| Handle sets for semi-active doors | | K-U6646-00-0-* |
| Handle sets for fixed doors | | K-U6610-00-0-* |
| * = Color | | ckaging Unit |

- 01 = Satin Chrome, 03 = Polished Brass, 04 = Antique Brass,
- 05 = Oil Rubbed Bronze, 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter




- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle

VENICE Zamac Trim Kits

| Description | PU | Part Number |
|---|----|----------------|
| Handle sets for active doors with US-cylinder | 1 | K-U7692-Z1-0-* |
| Handle sets for semi-active doors | 1 | K-U7646-Z0-0-* |
| Handle sets for fixed doors | 1 | K-U7610-Z0-0-* |

* = Color PU = Packaging Unit
01 = Satin Chrome, 5 = Dark Bronze PC, 6 = Black PC, 7 = White PC, 28 = Pewter



- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 1 3/4" and 2 1/4" thick doors
- US-cylinder above handle

ROMA Handle & 55mm Plates







Additional information

- Unassembled solid brass trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle



- Unassembled zamac trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- Self-centering 8mm spindle

| ROMA Solid Brass Trim Kits | | | |
|--|------------------|----------------|--|
| Description | PU | Part Number | |
| Handle sets for active doors with US-cylinder | 1 | K-U4092-01-0-* | |
| Handle sets for semi-active doors | 1 | K-U4046-00-0-* | |
| Handle sets for fixed doors | 1 | K-U4010-00-0-* | |
| Handle sets for smart lock | 1 K-U4092-D0-0-* | | |
| * = Color | PU = Pa | ckaging Unit | |
| 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter | | | |
| 11 25 28 | | | |
| K-U4092-01-0-* K-U4046-00-0-* | - | K-U4010-00-0-* | |

- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle
- Compatible with Danalock V3 smart lock

| ROMA Zamac Trim Kits | | | |
|---------------------------------|-----------------|----------|----------------|
| Description | | PU | Part Number |
| Handle sets for active doors wi | ith US-cylinder | 1 | K-U9092-Z1-0-* |
| Handle sets for semi-active do | ors | 1 | K-U9046-Z0-0-* |
| Handle sets for fixed doors | | 1 | K-U9010-Z0-0-* |
| Handle sets for smart lock | | 1 | K-U9092-D0-0-* |
| | * = Color | PU = Pa | ackaging Unit |
| 6 = Black PC | 6 | | |
| K-U9092-Z1-0-* | K-U9046-Z0-0-* | - | K-U9010-Z0-0-* |

- Stainless steel set screw on levers to secure spindle
- Patented handle clipping system
- Kit for 13/4" and 21/4" thick doors
- US-cylinder above handle
- Compatible with Danalock V3 smart lock

VIKING – ROMANCE Handles & 40mm Plates

Antique Series







| VIKING Trim Kits | | | | |
|--------------------------------------|--------------------|-----------------|----------------|--|
| Description | | PU | Part Number | |
| Handle sets for active doors | s with US-cylinder | 1 | K-C9718-US-0-* | |
| Handle sets HA for active decylinder | oors with US- | 1 | K-C9708-US-0-* | |
| Handle sets for semi-active | doors | 1 | K-C9708-46-0-* | |
| Handle sets for fixed doors | | 1 K-C9708-00-0- | | |
| | * = Color | PU = Pa | ckaging Unit | |
| 6 = Black, 08 = Pewter | 6 08 | | | |
| K-C9718-US-0-* | K-C9708-46-0-* | <u></u> | C-C9708-00-0-* | |

Additional information

- Unassembled trim kits
- US-cylinder with standard 5 pins Schlage "C" keyway
- 90° locking with thumb-turn
- 8mm spindle
- Stainless steel set screw on levers to secure spindle
- Kit for 1 3/4" and 2 1/4" thick doors
- US-cylinder above and below handle



| ROMANCE Trim Kits | | | |
|--------------------------------------|--------------------|---------|----------------|
| Description | | PU | Part Number |
| Handle sets for active doors | s with US-cylinder | 1 | K-C9719-US-0-* |
| Handle sets HA for active d cylinder | oors with US- | 1 | K-C9709-US-0-* |
| Handle sets for semi-active | doors | 1 | K-C9709-46-0-* |
| Handle sets for fixed doors | | 1 | K-C9709-00-0-* |
| | * = Color | PU = Pa | ackaging Unit |
| 6 = Black, 08 = Pewter | 6 08 | | |
| K-C9719-US-O-* | K-C9709-46-0-* | | K-C9709-00-0-* |

03.1.17

Strike Plates

for Door Lock








| Description | | | | | PU | Part Numb | er | |
|--|---------|---|---------|----|---------|----------------|----|--|
| Hook bolt strike | e plate | | | | 10 | 9-C4776-00-0-* | | |
| | | * | = Color | | PU = Pa | ckaging Unit | | |
| 03 = Polished Bras 11 = Satin Nickel, | , | • | • | | PC, 6 = | Black PC, | | |
| | | 5 | | 11 | 25 | 28 | | |

Additional information

- Solid brass or stainless steel
- Non-handed
- Two #8 x 5/8 FH/PH screws included
- For use with GU-SECURY SH2 door locks



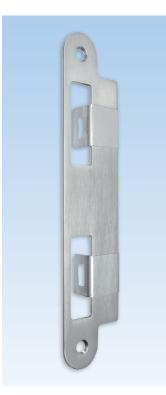

| | | 10 | 9-C4777-4 | 5-0-* |
|------------------------------|------------------------------|------------------------------------|---|---|
| | | | | |
| | | 10 | 9-C4777-5 | 7-0-* |
| * = Color | | PU = Pa | ckaging Unit | |
| ass, 5 = Dark 28 = Pewter | Bronz | e PC, 6 = | Black PC, | |
| 6 | 11 | 25 | 28 | |
| | ass, 5 = Dark 28 = Pewter | ass, 5 = Dark Bronz 28 = Pewter | ass, 5 = Dark Bronze PC, 6 = 28 = Pewter | ass, 5 = Dark Bronze PC, 6 = Black PC, 28 = Pewter |

- Solid brass or stainless steel
- Non-handed
- With clear protective film
- Available in handle matching finishes
- Two #8 x 5/8 FH/PH screws included
- For use with GU-SECURY SH2, S-Bolt, Automatic and mortise door locks

Strike Plates

for Door Lock









| Bag of Strike Plates | | | |
|---|-----------|-------------|----------------|
| Description | | PU | Part Number |
| Bag of strike plates for 45mm (1 3/4") thick doors | | 10 | K-C4770-45-0-* |
| Bag of strike plates for 57mm (2 1/4") thick doors | | 10 | K-C4770-57-0-* |
| | * = Color | PU = Pa | ackaging Unit |
| 03 = Polished Brass, 04 = Antique Br. 11 = Satin Nickel, 25 = Dark Bronze, | , | nze PC, 6 = | Black PC, |
| 03 04 5 | 6 1 | 1 25 | 28 |
| | | | |

- Solid brass or stainless steel
- Bag contains:
 - 1 middle strike plate with extended lip and clear protective film
 2 top and bottom oval strike plates


 - 6 screws
- Non-handed
- Available in handle matching finishes
- For use with GU-SECURY SH2 door locks

Strike Plates

for Door Lock





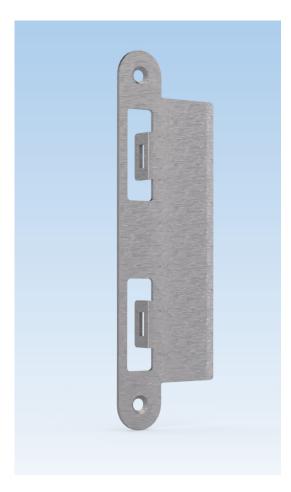

| Description | | PU | Part Number |
|--|-----------|--------|----------------|
| Latch and deadbolt strike p 76mm (3") thick doors | olate for | 10 | 9-C4717-59-0-* |
| | * = Color | PU = P | ackaging Unit |
| 8B = Stainless Steel | | | |
| | 8B | | |
| | | | |

- Made in stainless steel
- Non-handed
- Two #8 x 5/8 FH/PH screws included
- For use with GU-SECURY SH2, S-Bolt, Automatic and mortise door locks

for Door Lock







| Torx 15 T-Key | | | |
|---------------|-----------|---------|----------------|
| Description | Color | PU | Part Number |
| Torx key | Steel | 1 | H-00346-15-0-0 |
| | * = Color | PU = Pa | ackaging Unit |

Additional information

■ Used for connecting SH2 and Automatic extensions



| Fastening Screws | | | |
|------------------|-----------------|---------|----------------|
| Description | Color | PU | Part Number |
| D1 screws | Stainless Steel | 1000 | 9-C5362-32-0-8 |
| | * = Color | PU = Pa | ckaging Unit |

- Stainless steel lock fastening screws
- Type D1 with self-drilling spiral point and high duplex thread with "Quadrex" socket
- Sharp tip for quick drive

for Lever Handle



FERCO



| Description | n | | | | P | U | Part Nu | mber | |
|------------------------------|---------|--|---------|----|----|---------------------|---------|----------|--|
| Color chip | s | | | | 1 | | K-C4780 | 0-00-0-0 | |
| | | | * = Col | or | Pl | PU = Packaging Unit | | | |
| 01 = Satin C 5 = Dark Bro | nze PC, | | , | | | , | | | |
| 28 = Pewter | | | | | | | | | |



| Description | | | | PU | Part Number | | | |
|------------------|------|--------|----|--------|---------------------|--|--|--|
| Handle exten | ders | | | 1 | 9-C0695-00-0-* | | | |
| | | * = Co | or | PU = I | PU = Packaging Unit | | | |
| 01 = Satin Chroi | , | , | | , | | | | |
| 05 - Oli Rubbeu | | | | | | | | |

Additional information

- Made of solid brass
- Use with our solid brass handle sets
- Extends 18mm




| Fixing Plate for Dummy Trim Kits | | |
|---|---------|----------------|
| Description | PU | Part Number |
| Fixing plate used for fixed door handle | 50 | 9-U8210-00-0-3 |
| * = Color | PU = Pa | ackaging Unit |

- Made of Zinc plated steel
- Bag of two dummy plates and four #6 x 5/8" FH/PH screws

for Lever Handle





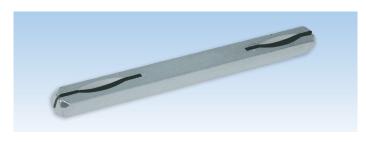

| 8mm Spindle | | | | |
|---|-----------|---------|----------------|--|
| Description | | PU | Part Number | |
| 8 x 8 x 120mm spindle for 41-57mm thick doors (1 spindle is supplied with door handle kit) | Zinc | 10 | 9-U8100-20-0-8 | |
| 8 x 8 x 130mm spindle for 57-76mm thick doors | Zinc | 10 | 9-U8100-30-0-8 | |
| | * = Color | PU = Pa | ckaging Unit | |




1 For 41-76 mm thick doors

| Description | PU | Part Number |
|---|--------|----------------|
| M5 x 90mm screws (2 screws are supplied with door handle kit) | 1 | 9-U2510-90-R-* |
| * = Color | PU = P | ackaging Unit |







| Set Screw & Allen Key | | | |
|---|-----------------|---------|----------------|
| Description | Color | PU | Part Number |
| M5 set screw (2 screws are included with door handle kit) | Stainless Steel | 1 | 9-U6008-05-0-1 |
| Allen key 2.5 x 20 x 100mm (1 Allen key is supplied with door handle kit) | Black | 1 | 9-C0955-10-0-0 |
| | * = Color | PU = Pa | ackaging Unit |





| Knob Tail Replacement Kits | | | |
|--|-----------|---------|----------------|
| Description | Color | PU | Part Number |
| 48mm knob tail with snap rings | Black | 1 | K-C0600-48-0-0 |
| 72mm recutable knob tail with snap rings | Black | 1 | K-C0600-72-0-0 |
| | * = Color | PU = Pa | ackaging Unit |

- Knob tail made of tempered steel
- Used for semi-active handle trim kits

for Lever Handle



FERCO





| Snap Rings | | | |
|-------------------------|-----------|---------|----------------|
| Description | Color | PU | Part Number |
| Snap ring | Black | 1 | 9-C0645-02-0-6 |
| Snap ring – low profile | Black | 1 | 9-C0645-03-0-6 |
| | * = Color | PU = Pa | ackaging Unit |



| Washers | | | |
|---|-----------|---------|----------------|
| Description | Color | PU | Part Number |
| Nylatron washer 0.25mm x 16mm (inner dia.) | Clear | 1 | 9-C0647-25-0-0 |
| Nylatron washer 0.5mm x 16mm (inner dia.) | Clear | 1 | 9-C0647-50-0-0 |
| Nylatron washer 1.0mm x 16mm (inner dia.) | Clear | 1 | 9-C0647-10-0-0 |
| | * = Color | PU = Pa | ackaging Unit |



| "O" Ring | | | |
|---------------------------------------|-----------|---------|----------------|
| Description | Color | PU | Part Number |
| "O" ring 1.5mm x 16mm (inner dia.) | Black | 1 | 9-C0953-00-0-6 |
| | * = Color | PU = Pa | ackaging Unit |



- 1 For 41-57 mm thick doors
- 2 For 41-76 mm thick doors

| Description | Color | PU | Part Number |
|--|-------------|----|-----------------|
| Cylinder with 52mm tail and set of three keys | Zinc | 1 | 6-C0971-52-0-1 |
| | Brass | 1 | 6-C0971-52-0-3 |
| | Dark Bronze | 1 | 6-C0971-52-0-25 |
| ② Cylinder with 90 mm tail and set of three keys | Zinc | 1 | 6-C0971-90-0-1 |
| | Brass | 1 | 6-C0971-90-0-3 |
| | Dark Bronze | 1 | 6-C0971-90-0-25 |

| Key Alike Cylinders Schlage "C" Keyway | | | |
|---|------------------------------|-------------|---|
| Description | Color | PU | Part Number |
| ① Cylinder with 52mm tail and set of three keys | Zinc Brass Dark Bronze | 1 1 1 | 6-C0971-52-9-1 6-C0971-52-9-3 6-C0971-52-9-25 |
| (2) Cylinder with 90mm tail and set of three keys | Zinc Brass Dark Bronze | 1 1 1 | 6-C0971-90-9-1 6-C0971-90-9-3 6-C0971-90-9-25 |
| | * = Color | PU = Pa | ackaging Unit |

for Lever Handle







| Gasket 55mm | | | | |
|---------------------------|-----------|---------|----------------|--|
| Description | Color | PU | Part Number | |
| Gasket for active plate | Black | 1 | 6-C0825-55-0-6 | |
| Gasket for inactive plate | Black | 1 | 6-C0826-55-0-6 | |
| | * = Color | PU = Pa | ackaging Unit | |

for Strike Plate



FERCO







| Dust Cup – 25mm | | | |
|-----------------|-----------|------------------|--|
| Description | Color | PU | Part Number |
| Plastic cup | Black | 10 100 500 | 9-C4765-00-0-6 9-C4765-1C-0-6 9-C4765-5C-0-6 |
| | * = Color | PU = P | ackaging Unit |

Additional information

- Use for latch and 2 automatic latches (optional)
- Dimensions: - Length: 62mm - Width: 19.5mm - Depth: 25.8mm

| Dust Cup – 15mm | | | | |
|-----------------|-----------|---------------------|--|--|
| Description | Color | PU | Part Number | |
| Plastic cup | Black | 10 100 500 | 9-C4765-0A-0-6 9-C4765-1C-A-6 9-C4765-5C-A-6 | |
| | * = Color | PU = Packaging Unit | | |

Additional information

■ Dimensions:

- Length: 62mm - Width: 19.5mm - Depth: 16mm

| Description | | | | | PU | Part Number |
|--|--------|-----|---------|----|---------|----------------|
| #8 x 5/8" (16mm) s | screws | | | | 10 | K-C4763-16-6-* |
| | | * = | - Color | | PU = Pa | ckaging Unit |
| 03 = Polished Brass, 04 = Antique Brass, 5 = Dark Bronze PC, 6 = Black PC, 11 = Satin Nickel, 25 = Dark Bronze, 28 = Pewter | | | | | | |
| 03 | 0.4 | 5 | 6 | 11 | 25 | 28 |

- Bag of 6 screws for strike plates
- #8 x 5/8" FH/PH screws

for Construction







| Construction Handle Set | | | | |
|-------------------------|-----------|---------|----------------|--|
| Description | Color | PU | Part Number | |
| Construction handle | Black | 25 | K-C9250-25-0-6 | |
| | * = Color | PU = Pa | ckaging Unit | |

Additional information

- Reinforced nylon temporary door trim sets
- 8 x 8 x 90mm square spindle included
- 4.2 x 50mm screws included
- For 13/4" thick doors
- Locking/Unlocking from inside only



| Construction Key | | | | |
|------------------|-----------|---------------------|----------------|--|
| Description | Color | PU | Part Number | |
| Construction key | Black | 10 | 9-U0001-01-0-0 | |
| | * = Color | PU = Packaging Unit | | |

Additional information

The construction key is available for those who prefer to install the decorative hardware trim and lever sets on doors after the construction has been completed. Installing the escutcheon plates and levers in the final stage of construction prevents the decorative trim from becoming scratched or damaged.

The construction key has been designed to accommodate multipoint door hardware (8mm square), tilt-turn hardware (7mm square) and lift-slide hardware (10mm square).


Wood Mount Display

for Lever Handle







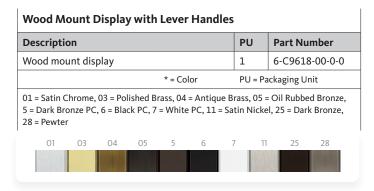

Additional information

 To be used with 30 and 45mm escutcheons and Capri, Torino, Allegro or Venice handles **HEAD OFFICE**

ferco@ferco.ca

Ferco Architectural Hardware Inc. 2000, Berlier St. Laval, QC H7L 4S4 Tel.: 450 973-1437 1 800 355-8810 Fax: 450 973-7661

ONTARIO / WESTERN PROVINCES

905 282-9588 1 800 668-5310 Fax: 905 282-9915 UNITED STATES

Tel.: 1 800 927-1097 1 888 454-0161 Edition 05.2022 | Printed in Canada

www.ferco.ca





